


TBS1

series

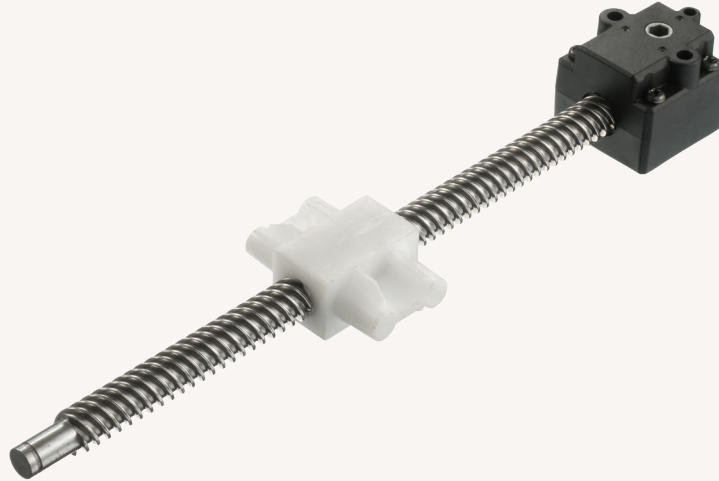

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.

Due to continuous development in order to improve our products, TiMOTION products are subject to frequent modifications and changes without prior notice.


TiMOTION reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by TiMOTION.

General Features

Lead	16mm
Maximum load	1,000N
Especially designed for TGM series	

Drawing

Standard Dimension

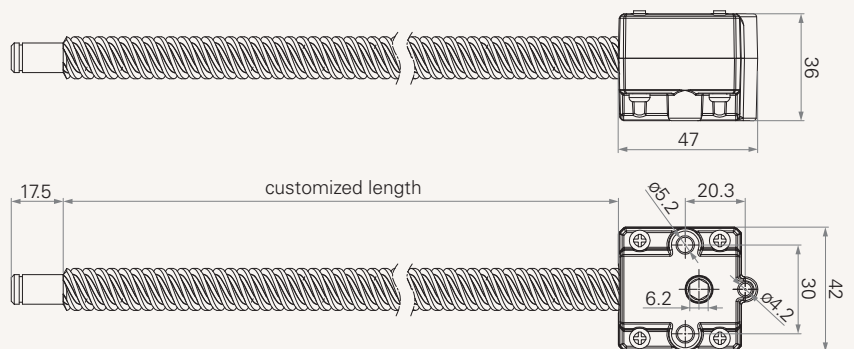

TBS1

Version: 20130726-A

<input type="checkbox"/>	Load and Speed	See appendix		
<input type="checkbox"/>	Stroke			
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>	Retracted Length	Stroke + 135mm		
<input type="checkbox"/>		Note : The retracted length above have choose standard nut + Ø26 inner tube and plastic front attachment. The retracted length will be adjusted if choose other options		
<input type="checkbox"/>				
<input type="checkbox"/>	Drive Shaft Hole on Gearbox	1 = HEX, 6mm	A = Customized	
<input type="checkbox"/>	NUT	1 = Standard NUT (with Ø26mm inner tube)	A = Customized	
<input type="checkbox"/>	Inner Tube	0 = Without (NUT is the fixation component)	1 = Ø26 inner tube	A = Customized
<input type="checkbox"/>	Front Attachment	0 = Without front attachment and inner tube 1 = Punch hole on inner tube Ø10mm, without front attachment	2 = Plastic front attachment	A = Customized
		Note : #2 wait for open mold		